

PROJECT NAME:	JLS (HUIZHOU) CO.,LTD
PROJECT NOTES:	Building A, Jinyu East Jewelry Industrial Park, Qiuchang Town, Huiyang District Huizhou City, Guangdong Province, China, 516221 www.jls-china.com E: sales@jls-china.com T: +86 752 3877818 ext. 8013


SOLAS (Solar LED Advance Smartlight) - Solar LED Flood Light

DESCRIPTION:

JLS China's Commercial Solar Flood Light, a stand along Off Grid Outdoor Lighting System. It allows the lamp to be suitable for all location, entryways, garages, pathways, sheds and remote areas.

FEATURES & BENEFITS:

- ◆ Wattage Options: 6/12/15 Watt
- ◆ CCT Options: 3000K/4000K/5000K/5700K
- ◆ Remote Control
- ◆ IP65 Rating
- ◆ Build in Microwave sensor
- ◆ Solar Fixture come with 2.5 meters between lamp and solar panel
- ◆ Working temperature: -25°C-40°C
- ◆ 2 Years Warranty
- ◆ **OEM and Customization Available**

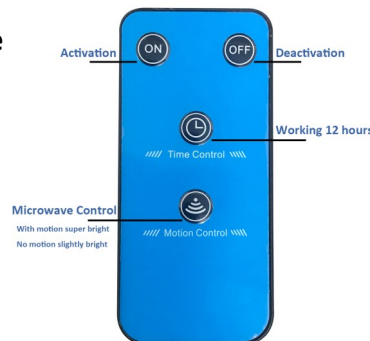

 Charging during the day

 Working at night

2 YEAR STANDARD WARRANTY—EXTENDED WARRANTIES AVAILABLE

RoHS 
Compliant

FCC

CE

(P) +0752 3877818 ext. 8013 | (F) +86 752 3877828 | (E) sales@jls-china.com | (W) www.jls-china.com

Specifications are typical values and may change without notification

efficiency. illuminated.

Solar Flood Light — Generation III

SPECIFICATIONS TABLE

Model	J168-SOL-6-F	J168-SOL-12-F	J168-SOL-15-F
LED Wattage	6W	12W	15W
Efficacy	100lm/W	100lm/W	100lm/W
Lumens	600lm	1,200lm	1,500lm
Solar Panel Power	Poly-Si (6V/10W)	Poly-Si (12V/18W)	Poly-Si (12V/30W)
Battery Capacity	Li-Ion 3.7V, 5.2Ah	Li-Ion 7.4V, 5.2Ah	Li-Ion 7.4V, 7.8Ah
Illumination Angle	120°		
Charge Time	3 - 4 Hours		
Operating Day	12-14 hours without Sun With Occupancy Sensor		
IP Rating	IP65		
Life (L70)	30,000+ Hours		
Power Source	Off Grid System		
CCT (K)	3000K / 4000K / 5000K / 5700K		
Operational Temperatures	-25°C — 40°C		
Housing Finish	Black		
Housing Material	Aluminum, Bracket is Iron		
Environment	Outdoor wet location		
Feature	Multi function control		
Warranty	2 years		



OEM AND CUSTOMIZATION AVAILABLE

(P) +0752 3877818 ext. 8013 | (F) +86 752 3877828 | (E) sales@jls-china.com | (W) www.jls-china.com

Specifications are typical values and may change without notification

efficiency. illuminated.